


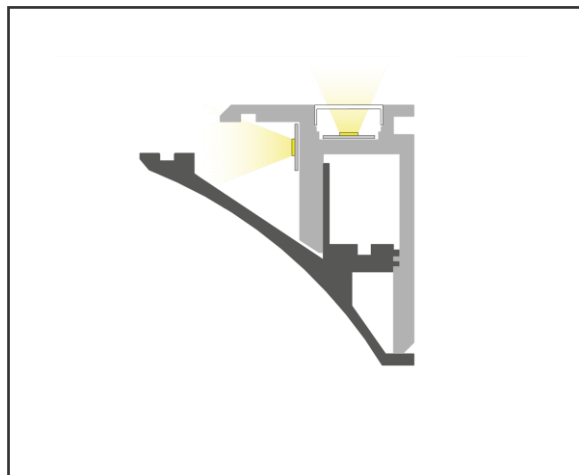
XCC Channel Coll.**XCC-C-SP-PULA**

Shelving Illumination

This specialty extrusion supports and lights up the shelf – a single anodized aluminum profile that holds either see through glass/plexiglass or solid panels up to 20mm thick while provide soft illumination across the shelf and the wall.

Features/Benefits

- **2-in-1 Shelving and Lighting Profile** – eliminates need of separate shelving brackets and light channels.
- **Wide range of shelving panels** – Supports thickness between 6-20mm panels, it handles real display weight with a max load of 5kg per 30cm of length
- **Multiple covers** – Choose from satin, frosted, or clear lens to provide desired light quality tuned to the application.
- **Silver anodized aluminum** – Robust aluminum construction with smooth, architectural-grade finish.
- **Applications** – retail display, hospitality back-bar shelving, residential built-ins, and architectural floating shelves.

**RoHS****IP20**

ORDERING LOGIC

<u>Model and Type</u>	<u>Family</u>	<u>Product ID</u>	<u>Finish</u>	<u>Length</u>
XCC-C Xicato Channel Collection	SP Speciality	PULA PULA	SA Silver Anodized	1 1m 2 2m

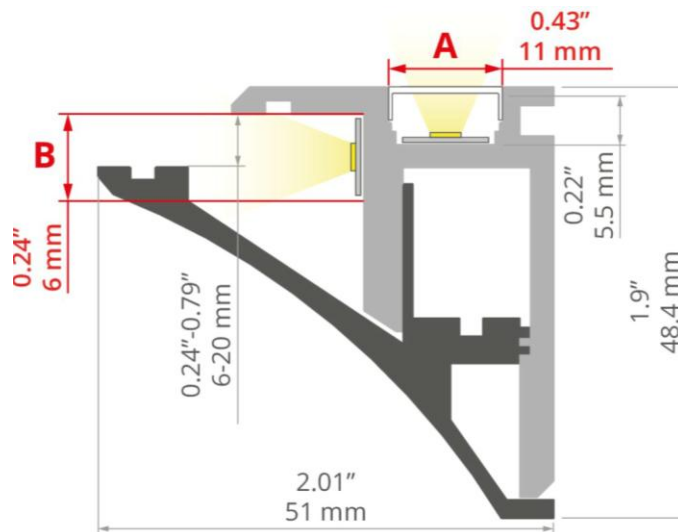
Example: XCC-C-SP-PULA-SA-2

(Xicato Channel Col Channel Extrusion, Speciality Family, PULA, Silver Anodized, 2 meter long)

TECHNICAL SPECIFICATIONS

Height 1.9" (33.02mm)	Lighting Angle NA	Outward Bend Radius NA
Width 2.0" (55.88mm)	Material Aluminum	Inward Bend Radius NA
LED Tape Width 0.4" (10.16mm), 0.2" (5.08mm)	Possible IP 20	Finish Silver Anodized
Profile Cross-Section NA	Possible Fixture Shape Linear	Available Length 1m, 2m

DIMENSIONAL DRAWING



RECOMMENDED XFL LINEARS TAPE LIGHT**WHITES**

Single Cut
XFL-SC



COB Static White
XFL-CSW



Static White
XFL-SW



Full Spectrum
XFL-FS



High Density
XFL-HD



Ultra Slim
XFL-US

Tunable White

COB Tunable White
XFL-CTW



Tunable White Dual Color
XFL-TWDC



Tunable White
XFL-TW

RECOMMENDED COVERS AND LENSES

Lens Cover	Color	Material	Transmission	Pixelation Note
XCC-L-HS11-FR	Frosted	PC	59%	Clean Line of Light
XCC-L-HS11-CL	Clear	PC	88%	Visible Dot*
XCC-L-LIGER11-ST	Satin	PC	59%	Clean Line of Light
XCC-L-LIGER11-BK	Black	PC	21%	Visible Dot*

Clean Line of Light



Visible LED Dots*



*Visibility of LED Dots will also depend on pitch and spacing of LED of the XFL used. Higher the density, the lesser visible dots.

RECOMMENDED ENDCAPS AND MOUNTS

SPECIALITY SERIES

Model	Type	Finish	XCC-C-SP-45PLUS	XCC-C-SP-NISANI	XCC-C-SP-PULA
XCC-E-SP-PULA-MT-LEFT	Left End Cap	Metalic			✓
XCC-E-SP-PULA-MT-RIGHT	Right End Cap	Metalic			✓

WARRANTY

4

YEAR WARRANTY

Limited Product Warranty

What is Covered

Xicato warrants the XCC product against defects in materials and workmanship for 4 years from date of purchase when used in accordance with product specifications and installation guidelines.

SAFETY AND INSTALLATION WARNINGS

- | |
|--|
| 1. Install per local/national electrical code by a licensed electrician. |
| 2. Power with UL Listed Class 2, 24VDC power supply only. |
| 3. Disconnect power before cutting or connecting tape light. |
| 4. Do not exceed maximum run length. Cut at designated cut points only. |
| 5. Do not power LED tape while coiled on reel. |
| 6. Adhere to clean, dry surface free of oils, silicones, and contaminants. |
| 7. Do not install where ambient temperature exceeds rated range. |
| 8. Verify all component compatibility before installation. |
| 9. Do not stare directly into illuminated LED light. |
| 10. Store unused product in anti-static bag. |
| 11. Failure to follow instructions voids warranty. |

Consumer Acknowledgment

Please read full Terms and Conditions at xicato.com. Licensed professionals strongly recommended.