



XCC Channel Coll. XCC-C-MC-MICRONK

Slim and Seamless

Provides a seamless centered line of light in a minimal and an unobtrusive profiles that recessed into the ceiling without sacrificing lighting performance.

Features/Benefits

- **Ultra-Low Profile** – Measured at 0.2" low-profile and recessed, it provides seamless line of light that disappears into the architecture.
- **Closet-Rated** – Safe for enclosed storage or closet spaces.
- **Easy Installation** – Cuttable to length with snap-in covers and end caps that can be recessed easily with adhesives or double-sided tape.
- **Multiple covers** – Choose from satin, frosted, or clear lens to provide desired light quality tuned to the application.
- **Applications** – closets, under-cabinet, millwork accent and reveals, furniture, display, coves, retail displays, residential and hospitality.

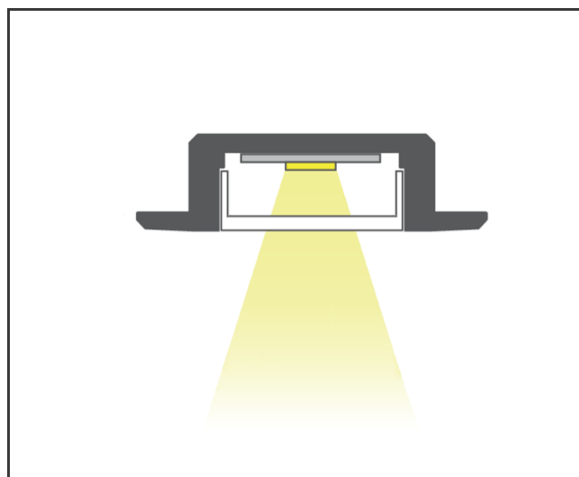

RoHS CE

IP20

IP67



ORDERING LOGIC

Model and Type	Family	Product ID	Finish	Length
XCC-C Xicato Channel Collection	MC Micro	MICRONK MICRONK	SA Silver Anodized BK Black	1 1m 2 2m


Example: XCC-C-MC-MICRONK-SA-2

(Xicato Channel Col Channel Extrusion, Micro Family, MICRONK, Silver Anodized, 2 meter long)

TECHNICAL SPECIFICATIONS

Height 0.2" (5.08mm)	Lighting Angle NA	Outward Bend Radius NA
Width 0.9" (22.86mm)	Material Aluminum	Inward Bend Radius NA
LED Tape Width 0.4" (10.16mm)	Possible IP 20, 67	Finish Silver Anodized, Black
Profile Cross-Section Rectangular	Possible Fixture Shape Linear, Round	Available Length* 1m, 2m

DIMENSIONAL DRAWING

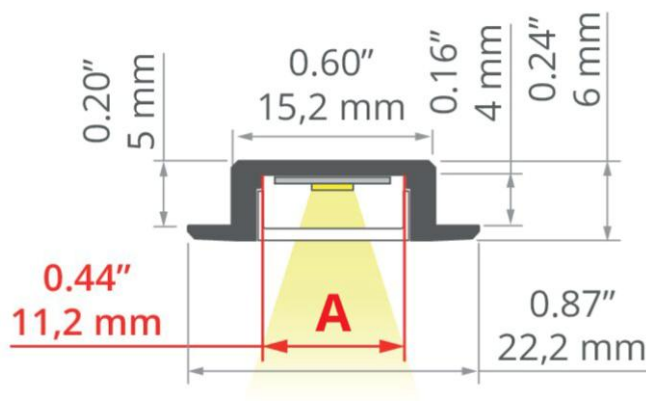

RECOMMENDED XFL LINEARS TAPE LIGHT**WHITES**

Single Cut
XFL-SC



COB Static White
XFL-CSW



Static White
XFL-SW



Full Spectrum
XFL-FS



High Density
XFL-HD

Tunable White

COB Tunable White
XFL-CTW



Tunable White Dual Color
XFL-TWDC



Tunable White
XFL-TW

RECOMMENDED COVERS AND LENSES

Lens Cover	Color	Material	Transmission	Pixelation Note
XCC-L-HS11-FR	Frosted	PC	59%	Clean Line of Light
XCC-L-HS11-CL	Clear	PC	88%	Visible Dot*
XCC-L-LIGER11-ST	Satin	PC	59%	Clean Line of Light
XCC-L-LIGER11-BK	Black	PC	21%	Visible Dot*

Clean Line of Light**Visible LED Dots***

*Visibility of LED Dots will also depend on pitch and spacing of LED of the XFL used. Higher the density, the lesser visible dots.

RECOMMENDED ENDCAPS AND MOUNTS

MICRO SERIES

Model	Type	Finish	XCC-C-MC-MICROPLUS	XCC-C-MC-MICRONK
XCC-E-MC-MICRONK-GR-STD	End Cap	Gray		✓
XCC-E-MC-MICRONK-BK-STD	End Cap	Clear Plastic		✓
XCC-E-MC-MICRONK-GR-HOLE	End Cap with Hole			✓
XCC-E-MC-MICRONK-BK-HOLE	End Cap with Hole			✓

WARRANTY

4

YEAR WARRANTY

Limited Product Warranty

What is Covered

Xicato warrants the XCC product against defects in materials and workmanship for 4 years from date of purchase when used in accordance with product specifications and installation guidelines.

SAFETY AND INSTALLATION WARNINGS

- | |
|--|
| 1. Install per local/national electrical code by a licensed electrician. |
| 2. Power with UL Listed Class 2, 24VDC power supply only. |
| 3. Disconnect power before cutting or connecting tape light. |
| 4. Do not exceed maximum run length. Cut at designated cut points only. |
| 5. Do not power LED tape while coiled on reel. |
| 6. Adhere to clean, dry surface free of oils, silicones, and contaminants. |
| 7. Do not install where ambient temperature exceeds rated range. |
| 8. Verify all component compatibility before installation. |
| 9. Do not stare directly into illuminated LED light. |
| 10. Store unused product in anti-static bag. |
| 11. Failure to follow instructions voids warranty. |

Consumer Acknowledgment

Please read full Terms and Conditions at xicato.com. Licensed professionals strongly recommended.