

XCC Channel Coll.



XCC-C-SP-NISANI

Cove Illumination

This mud-in ready cove extrusion that disappears into the wall or ceiling leaving only a clean illuminated aperture serves as an extension of the architecture itself.

Features/Benefits

- **Plaster-in installation** – no visible trim, reveal lines, or hardware once finished.
- **Clean integration** – into a standard drywall installation with its 32mm recess depth and generous installation footprint
- **Multiple covers** – Choose from satin, frosted, or clear lens to provide desired light quality tuned to the application.
- **Continuous Run** – option to connect multiple without visible joints to meet specifier needs and architectural requirements
- **Applications** – Coves, floating ceiling edges, perimeter coves, niche illumination, media room reveals, and spa or wellness architectural lighting.

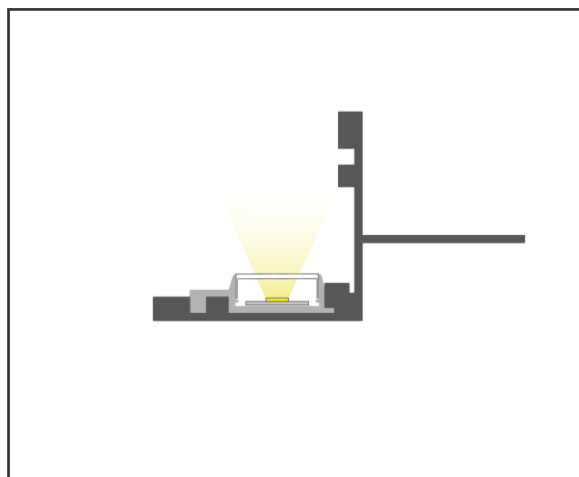

RoHS



IP20



ORDERING LOGIC

Model and Type		Family	Product ID		Finish	Length	
XCC-C	Xicato Channel Collection	SP Speciality	NISANI	NISANI	SN Silver Non-Anodized	1 2	1m 2m


Example: XCC-C-SP-NISANI-SA-2

(Xicato Channel Col Channel Extrusion, Speciality Family, Nisani, Silver Anodized, 2 meter long)

TECHNICAL SPECIFICATIONS

Height 1.3" (33.02mm)	Lighting Angle NA	Outward Bend Radius NA
Width 2.2" (55.88mm)	Material Aluminum	Inward Bend Radius NA
LED Tape Width 0.4" (10.16mm)	Possible IP 20	Finish Silver Anodized
Profile Cross-Section Rectangular	Possible Fixture Shape Linear	Available Length 1m, 2m

DIMENSIONAL DRAWING

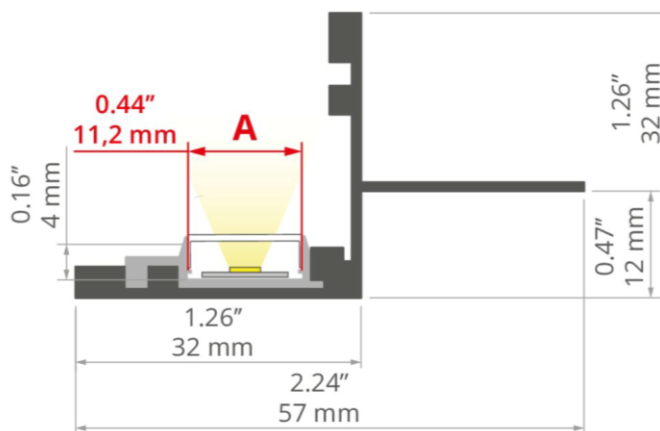

RECOMMENDED XFL LINEARS TAPE LIGHT**WHITES**

Single Cut
XFL-SC



COB Static White
XFL-CSW



Static White
XFL-SW



Full Spectrum
XFL-FS



High Density
XFL-HD

Tunable White

COB Tunable White
XFL-CTW



Tunable White Dual Color
XFL-TWDC



Tunable White
XFL-TW

RECOMMENDED COVERS AND LENSES

Lens Cover	Color	Material	Transmission	Pixelation Note
XCC-L-HS11-FR	Frosted	PC	59%	Clean Line of Light
XCC-L-HS11-CL	Clear	PC	88%	Visible Dot*
XCC-L-LIGER11-ST	Satin	PC	59%	Clean Line of Light
XCC-L-LIGER11-BK	Black	PC	21%	Visible Dot*

Clean Line of Light



Visible LED Dots*



*Visibility of LED Dots will also depend on pitch and spacing of LED of the XFL used. Higher the density, the lesser visible dots.

RECOMMENDED ENDCAPS AND MOUNTS

SPECIALITY SERIES

Model	Type	Finish	XCC-C-SP-45PLUS	XCC-C-SP-NISANI
XCC-E-SP-NISANI-GR-STD	End Cap	Gray		✓

WARRANTY**4****YEAR
WARRANTY**

Limited Product Warranty

What is Covered

Xicato warrants the XCC product against defects in materials and workmanship for 4 years from date of purchase when used in accordance with product specifications and installation guidelines.

SAFETY AND INSTALLATION WARNINGS

- | |
|--|
| 1. Install per local/national electrical code by a licensed electrician. |
| 2. Power with UL Listed Class 2, 24VDC power supply only. |
| 3. Disconnect power before cutting or connecting tape light. |
| 4. Do not exceed maximum run length. Cut at designated cut points only. |
| 5. Do not power LED tape while coiled on reel. |
| 6. Adhere to clean, dry surface free of oils, silicones, and contaminants. |
| 7. Do not install where ambient temperature exceeds rated range. |
| 8. Verify all component compatibility before installation. |
| 9. Do not stare directly into illuminated LED light. |
| 10. Store unused product in anti-static bag. |
| 11. Failure to follow instructions voids warranty. |

Consumer Acknowledgment

Please read full Terms and Conditions at xicato.com. Licensed professionals strongly recommended.